

## MOUNTING PROCEDURE


KIT REAR FENDER  
HONDA CB500-X/HONDA CB500-F  
HONDA CBR500-R

## HGX5 PARAF

WWW.BARRACUDAMOTO.COM

## KIT

X1. CHAIN COVER BARRACUDA  
X1. REAR FENDER ABS  
X1. SPECIFIC BRACKET  
X2. TBL 6X10  
X1. SCREW 5X12  
X1. RUBBER WASHER  
X1. AUTOLOCK NUT Ø 5

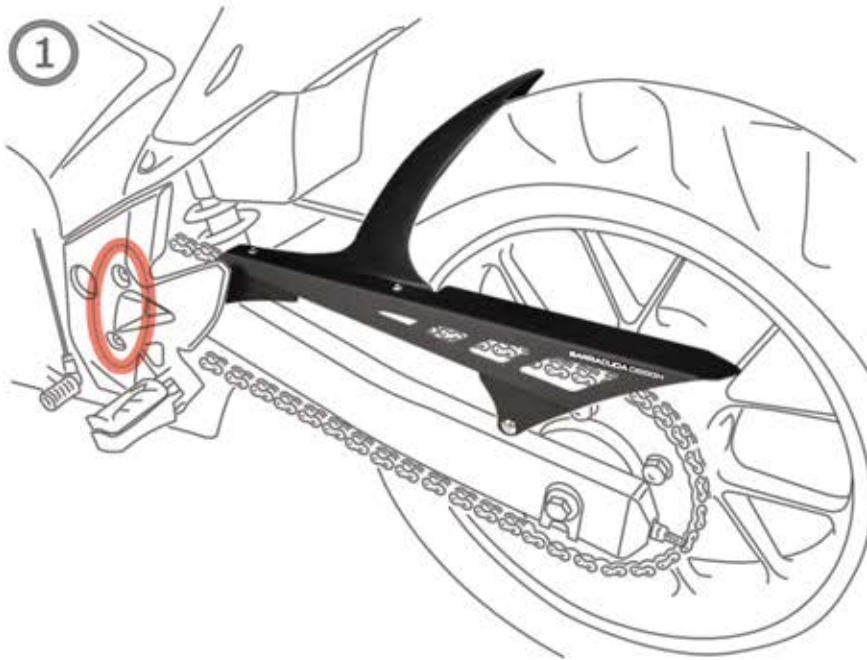

REMOVE THE FOOTPEGS OF THE TRANSMISSION SIDE UNLOCK THE SCREW SHOWN IN THE PICTURE (1).

REMOVE THE CABLE SUPPORT OF OPPOSITE SIDE (2).

REMOVE THE ORIGINAL CHAIN COVER SCREW THAT ARE ALONG THE FORK AND REMOVE THE ORIGINAL CHAIN COVER.

POSITION THE BARRACUDA CHAIN COVER LOCKING IT WITH THE 6X10 SCREWS.

POSITION THE SPECIFIC BRACKET LIKE SHOWN (2) BEING CAREFULLY TO PASSING THE BRACKET UNDER THE FORK CABLES AND BEHIND THE ABS REAR FENDER.

USE THE 5X12 SCREW AND THE AUTOLOCK NUT TO FIX IT.

CHECK THE POSITION AND THAN LOCK ALL.



NOTE: DON'T LOCK TOO MUCH TO AVOID ABS POSSIBLE DAMAGES.